

Thermobile Used Oil Heaters = Free Heat For Your Shop!!

A Thermobile Used Oil heater is the smart way to utilize used oil, transmission fluid, hydraulic fluid, synthetic, and cooking oil to heat your shop. The EPA approved method of recycling used oil while burning it on site for heat recovery eliminates costly hauling fees, "cradle to grave" disposal liability, and heating costs. Used oil heating technology permits the end user to recover the investment costs within possibly one heating season because of the savings from using waste fluids instead of increasingly expensive fuel oil.



AT 306: 100,000 BTUH



AT 307: 100,000 BTUH



AT400: 140,000 BTUH



AT500: 200,000 BTUH

THERMOBILE®



Thermobile used oil heaters are backed by 40 years of experience in the manufacturing and development of portable heating equipment. All models are equipped with an onboard fuel tank. Full combustion is achieved in a vaporizing system and non burnable residue is retained in the burner pan. This system does not produce any unpleasant smell or smoke when properly vented. They are built using the most up to date technology and carry a 12 month warranty ensuring customer satisfaction.


AT 306

The AT 306 is recommended only for applications where flammable vapors are not present because the fire draws its oxygen from holes punched in the chamber. The AT 306 comes standard as a radiant heater or an optional Thermo Blower can be purchased to increase heat throw.

AT 307/400/500

The AT 307/400/500 all offer a fully enclosed lock down burner chamber with an internal combustion fan so the flame is in a closed loop. All offer either a Thermo Blower or an internal axial fan for optimal heat throw.

Working principles: (no need for compressed air)

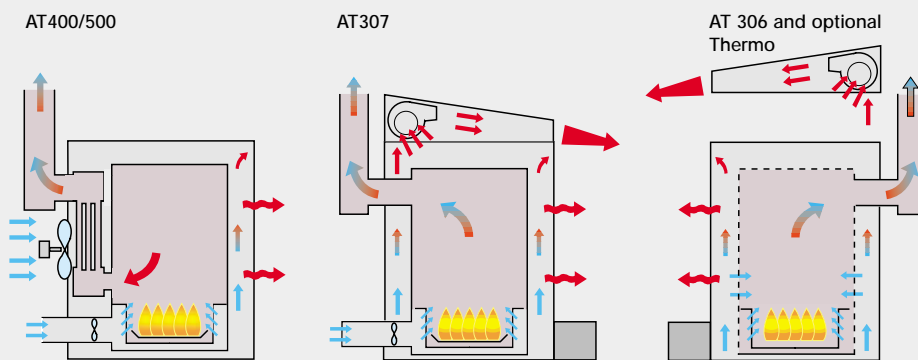

Flue Stack Requirements:

AT 306/307/400 require a -0.06 inch water column with 6 inch flue stack. A minimum flue height of 3 feet from the roof apex and 13 feet above ground level is required.

AT 500 requires an 8 inch flue stack with a minimum flue height of 3 feet from the roof apex and 15 feet above ground level. A "T Piece" with a draft stabilizer comes standard on all models.

Thermobile used-oil heaters feature:

- Durable and safe housing with powder coating
- Internal vaporizing burner
- Flame failure security
- High/low manual heat regulation
- Manual ignition system
- Overheat thermostat
- Oil overflow security



Model	Heating Area* Sq. Ft.	Tank Capacity Gallons	BTUH Low	BTUH High	Fuel Use Per Hour Low	Fuel Use Per Hour High	AMP	Power
AT 306	-	13	66,000	100,000	.5	.8	.5	120/60Hz
AT 306 Thermo	1,500	13	66,000	100,000	.5	.8	1.5	120/60Hz
AT 307	1,500	13	66,000	100,000	.5	.8	2.0	120/60Hz
AT 400	5,000	14.5	82,000	140,000	.7	1.0	2.5	120/60Hz
AT 500	7,000	14.5	125,000	200,000	1.0	1.6	2.5	120/60Hz

* Varies with locations, R-value and heat loss, Design and specifications subject to change without notice. Thermobile heaters do not require compressed air!

Your local Thermobile dealer: **DISTRIBUTED BY**

Franklin
20 Cedar Street
Franklin, PA 16323

Office: 814.432.4228
Fax: 814.432.4658
Toll Free: 800.533.9870

Cleveland
15151-2 York Road
North Royalton, OH 44133

Office: 440.237.9277
Fax: 440.237.8079
Toll Free: 888.488.9288



www.Fultz-Enterprises.com

