


CW Premium Series

Gasoline - Belt Drive Pressure Washer



Mi-T-M® CORPORATION

1. Performance-proven engine with low-oil protection
2. Belt drive triplex piston pump with ceramic plungers
3. Quick connect nozzles (0°, 15°, 25° and 40°)
4. External bypass system allows more water into the system to protect from heat build-up
5. Thermal relief valve
6. Stainless-steel and brass unloader mounted on base plate
7. Forged brass manifold (nickel plated brass on CW-4004-3MV0)
8. Water filter with clear sleeve for screen inspection
9. 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
10. Professional-grade insulated trigger gun with safety lock-off
11. 36 inch steel powder coated lance with rubber grip

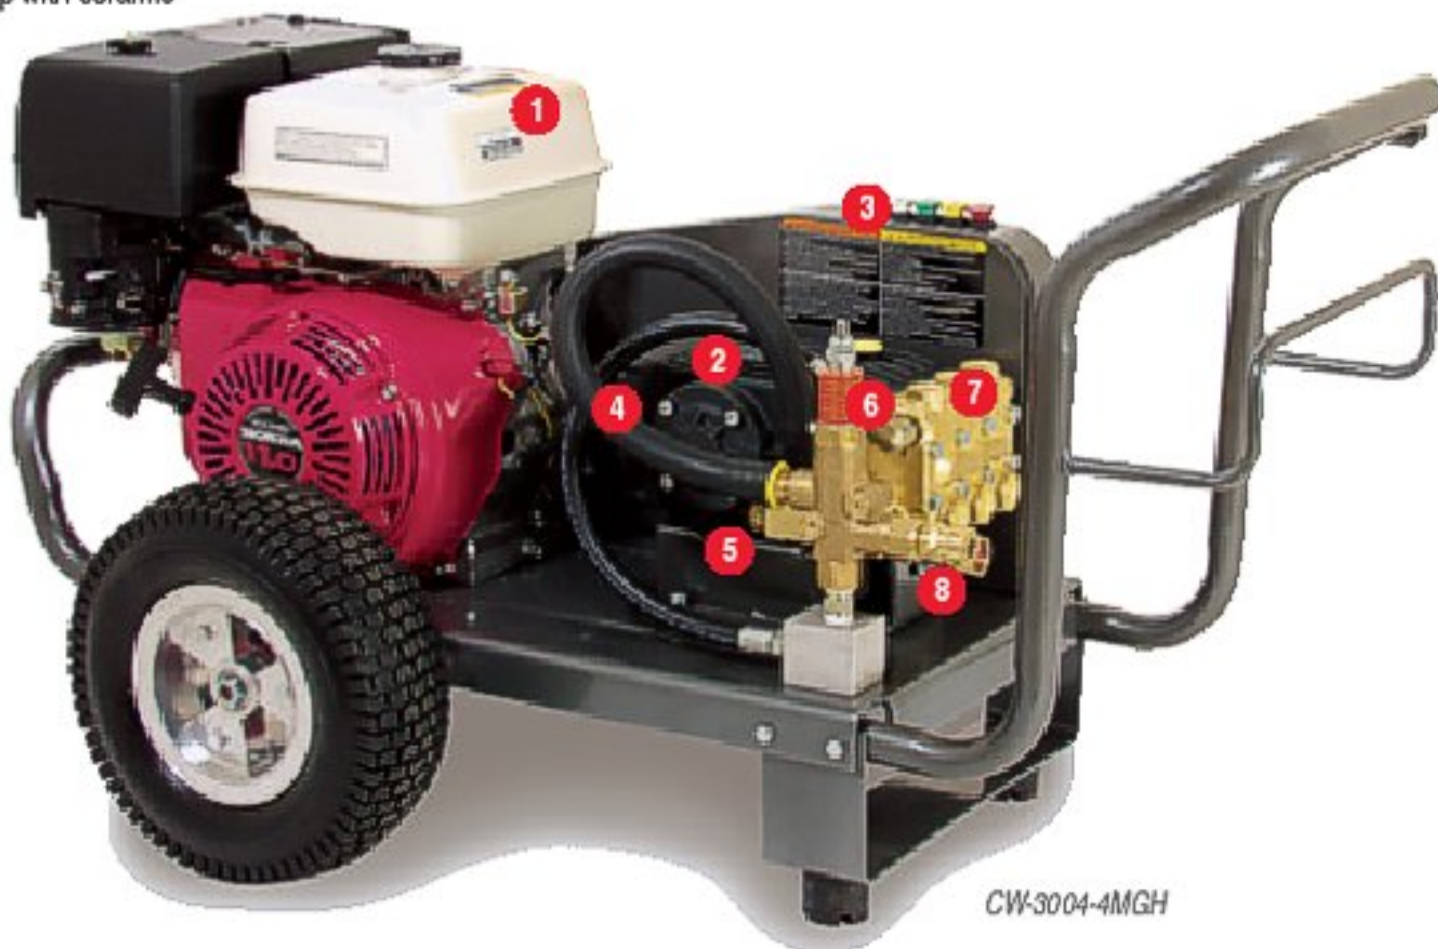

CW-3004-4MGH



Model #	PSI	GPM	HP	Engine	Pump	Unit Dim. (LxWxH)	Ship Wt.	Net Wt.
CW-2505-4MGH	2500	4.4	11.0	OHV Honda	General	45.5 in. x 28 in. x 26 in.	289 lbs.	215 bs.
CW-2505-4MGV	2500	4.4	11.0	OHV Vanguard	General	45.5 in. x 28 in. x 26 in.	295 lbs.	221 bs.
CW-3004-4MGH	3000	3.5	11.0	OHV Honda	General	45.5 in. x 28 in. x 26 in.	284 lbs.	213 bs.
CW-3004-4MGV	3000	3.5	11.0	OHV Vanguard	General	45.5 in. x 28 in. x 26 in.	284 lbs.	220 bs.
CW-3255-4MV0*	3200	4.9	16.0	OHV Vanguard	General	46 in. x 28 in. x 30 in.	328 lbs.	250 bs.
CW-3504-4MGH	3500	3.7	13.0	OHV Honda	General	46 in. x 28 in. x 30 in.	291 lbs.	216 bs.
CW-3504-4MGV	3500	3.7	13.0	OHV Vanguard	General	46 in. x 28 in. x 30 in.	293 lbs.	218 bs.
CW-4003-3MGH	4000	3.0	13.0	OHV Honda	General	46 in. x 28 in. x 30 in.	291 lbs.	216 bs.
CW-4003-3MGV	4000	3.0	13.0	OHV Vanguard	General	46 in. x 28 in. x 30 in.	293 lbs.	218 bs.
CW-4004-3MV0*	4000	4.0	16.0	OHV Vanguard	General	46 in. x 28 in. x 30 in.	327 lbs.	249 bs.
CW-4004-4MV0*	4000	4.0	16.0	OHV Vanguard	AR	46 in. x 28 in. x 30 in.	327 lbs.	249 bs.

*Electric start (battery included).

DISTRIBUTED BY

Franklin
20 Cedar Street
Franklin, PA 16323

Cleveland
15151-2 York Road
North Royalton, OH 44133



Office: 814.432.4228
Fax: 814.432.4658
Toll Free: 800.533.9870

Office: 440.237.9277
Fax: 440.237.8079
Toll Free: 888.488.9288

www.Fultz-Enterprises.com

This product information was reproduced and edited by Fultz Enterprises with permission of Mi-T-M Corporation.



Certified to UL-1776 Standards