


CW Series

Electric - Stationary Belt Drive Pressure Washer



Mi-T-M® CORPORATION

1. Totally enclosed fan-cooled electric motor (manual thermal overload protection on CW-2004 only)
2. Dual cogged belt drive system
3. Belt drive triplex ceramic plunger pump
4. Forged brass manifold
5. Conveniently located on/off switch
6. In-line water strainer
7. Removable panel for pump maintenance
8. Quick connect nozzles (0°, 15°, 25° and 40°)
9. Rubber isolators
10. Stainless-steel base and frame
11. Easy-to-access cabinet design
12. Professional-grade insulated trigger gun with safety lock-off
13. Adjustable pressure insulated dual lance
14. 3/8 inch x 50 foot non-marking pressure hose with quick connects, swivel and bend restrictors

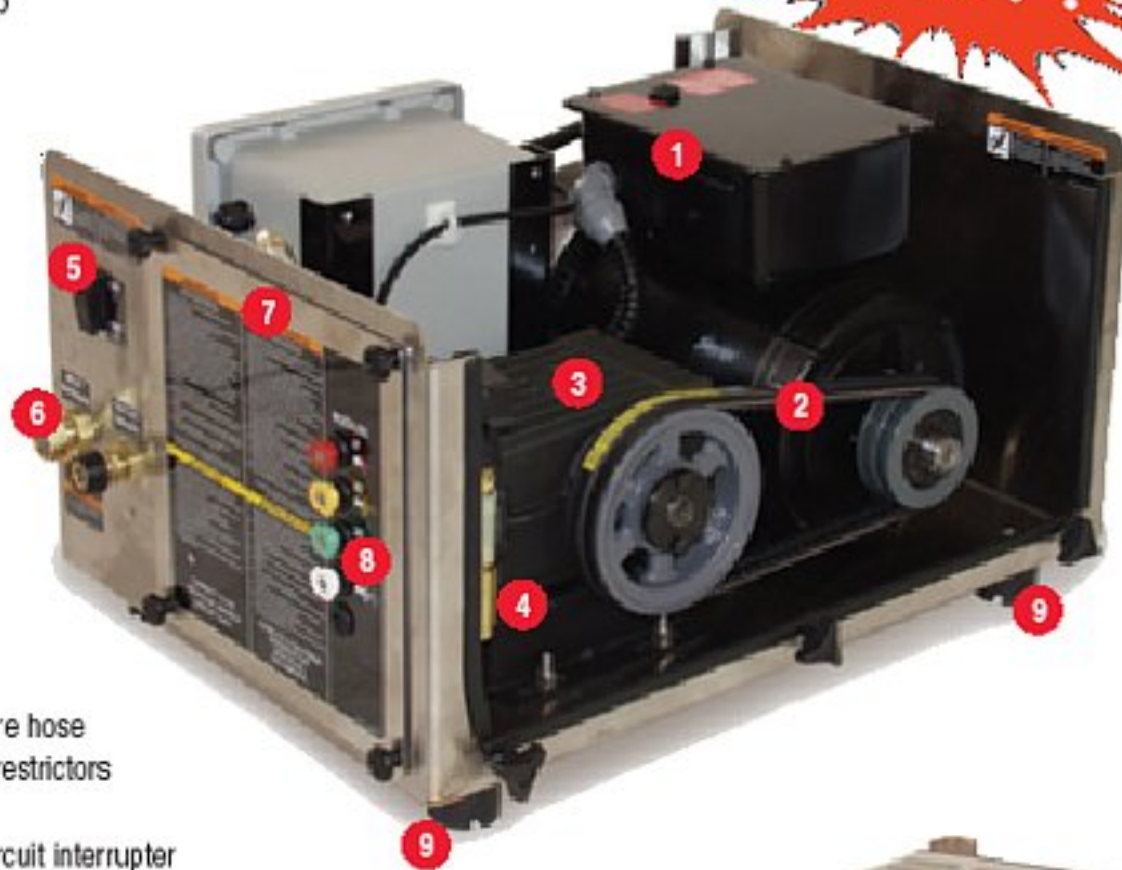

Additional features:

- 4 foot electrical cord with ground fault circuit interrupter (NEMA 5-20P, 20 amp plug on 1000 PSI model)
- Bypass system
- Thermal relief valve
- Stainless-steel and brass unloader mounted on base plate
- Low pressure detergent injection
- Shutdown timer



CW-2004-SME1 shown with optional stainless-steel wall mounting bracket (AW-9501-0000).

Model #	PSI	GPM	HP	Voltage/Phase/Amp	Pump	Unit Dim. (LxWxH)	Ship Wt.	Net Wt.
NEW! CW-1003-SME1	1000	2.5	2.0	120V/1Ø/18.8	General	40 in. x 25 in. x 26.5 in.	259 lbs.	172 lbs.
NEW! CW-2004-SME1	2000	3.9	6.0	230V/1Ø/24.1	General	40 in. x 25 in. x 26.5 in.	259 lbs.	172 lbs.

DISTRIBUTED BY

Franklin
20 Cedar Street
Franklin, PA 16323

Cleveland
15151-2 York Road
North Royalton, OH 44133



Office: 814.432.4228
Fax: 814.432.4658
Toll Free: 800.533.9870

Office: 440.237.9277
Fax: 440.237.8079
Toll Free: 888.488.9288

www.Fultz-Enterprises.com

This product information was reproduced and edited by Fultz Enterprises with permission of Mi-T-M Corporation.



Certified to UL-1776 Standards