

Compact Booster

Stationary, Cold Water, Electric Pressure Washer



KEW



Stationary units are easy to use, save time and money and reduce storage needs:

- Compact, wall mounted design eases storage.
- Unit can be connected to piping system with several outlet points for cleaning in a multitude of sites.
- Reduced need for electrical connections, transport of cable and machine: the unit is immediately available for use – simply connect the hose and clean away.
- Extra Hygiene: A stationary unit need not be in proximity to the cleaning site, ensuring a higher level of hygiene for example in milk sheds, food industry and much more.

Reduced installation requirements mean saving time: you go straight to cleaning and get the job done as quickly as possible.

The COMPACT BOOSTER is a new stationary cold water unit available both in 115V and 220V for around small farms, garages, bakeries and in supermarkets. It can also be used around swimming pool areas and golf courses, or for any general cleaning tasks that occur in a fixed site.


- 1 Stainless steel cabinet is easy to clean, thus maintaining high hygiene levels in your surroundings.
- 2 Servicing is easy thanks to the visible oil sight.
- 3 Easy to use, single start/stop button – just switch on and clean.

Stationary products require no transport and are ideal for sites where cleaning is always in the same place. Just attach the hose and clean.

Easy and quick serviceability

- 1 TEFC motor assures low noise level and protects motor windings from corrosion and humidity.
- 2 Totally new pump with 3 ceramic pistons and brass pump head for long lifetime and intense use.
- 3 Motor pump unit swings out easily for simple servicing.

Unit can run on pre-heated water up to 130-140°F for extra cleaning and degreasing power.

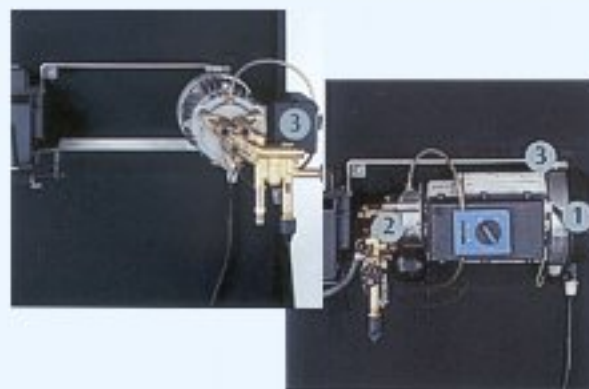

Start/Stop button



Visible Oil Level Indicator

KEW Pump Technology



Technical data: KEW COMPACT BOOSTER 115V

Pump pressure (max)	PSI	1000
Water flow (max)	GPM	2.5
Auto Start/Stop		Yes
Max inlet temp	°F	130-140
Power	HP	3.0
Voltage/phase/frequency/current	V~/Hz/A	115/1/60/19

140°F with direct feed from water inlet to pump.

Technical data: KEW COMPACT BOOSTER 220V

Pump pressure (max)	PSI	2000
Water flow (max)	GPM	3.5
Auto Start/Stop		Yes
Max inlet temp	°F	130-140
Power absorbed	HP	6.0
Voltage/phase/frequency/current	V~/Hz/A	220/1/60/20

140°F with direct feed from water inlet to pump.

The COMPACT BOOSTER can also be equipped with a wide range of accessories for floor, surface and equipment cleaning – please consult your distributor.



ALTO Cleaning Systems, Inc.
12249 Nations Ford Rd.
Pineville, NC 28134



This product information was reproduced and edited by Fultz Enterprises with permission of ALTO Cleaning Systems, Inc.

DISTRIBUTED BY

Franklin
20 Cedar Street
Franklin, PA 16323

Office: 814.432.4228
Fax: 814.432.4658
Toll Free: 800.533.9870

Cleveland
15151-2 York Road
North Royalton, OH 44133

Office: 440.237.9277
Fax: 440.237.8079
Toll Free: 888.488.9288



www.Fultz-Enterprises.com