

Contractor Series




"Skid-Mount" Gasoline and Diesel Powered Hot Water Pressure Washers



Key Features

- High performance triple-pass burner
- KEW Technology's rugged and dependable 03/C3 pumps
- Choice of gasoline or diesel engine power for locations without electrical power
- Powerful, heavy-duty cleaning capability with as much as 3200 psi and 4.8 gpm
- Steam cleaning capability

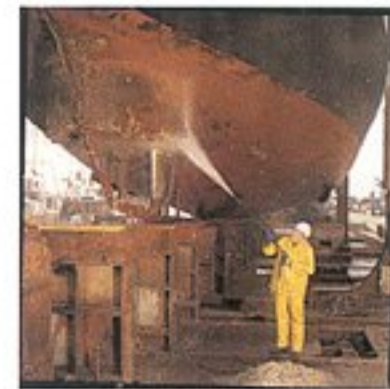

PRODUCT

- Heavy duty cage-style frame with durable powdercoated finish designed for easy lifting with forks or sling
- Heavy duty "triple-pass" vertical coil and burner with flame sensor to prevent burner "flooding"
- Thermostat, temperature indicator, pressure gauge and controls on a single, accessible panel
- Choice of 13 HP Honda OHV gasoline engine, or 16 HP Rugggerini diesel engine
- KEW Technology's 'C3', direct drive, half-speed, 4 cylinder pump engineered for heavy-duty industrial cleaning applications
- Burner fuel and air systems are driven direct No belts, generators, or blower motors
- High quality engine and component mounts eliminate harmful vibration

- Maximum outlet temperature of 302°F provides the cleaning capabilities of steam for heavy duty applications
- 36" maximum width allows transportation in small trucks and trailers
- KEW ERGO 3000 Spray Gun



SAFETY

- All systems operate on 12 or 24 volts
- Flow-actuated unloader with integral overpressure safety valve relieves hose pressure while machine is in bypass
- Dual flow switches control burner operation and a flame sensor monitors for abnormal combustion

EASE OF USE

- Quick-couplers connections for the inlet hose, and the 50 ft high pressure hose
- Convenient on-board storage for the lance, high pressure hose, and detergent containers
- Electric start standard on both models Contractor Diesel equipped with auto-throttle
- Pumps capable of 16 ft self-priming suction lift for operation from tanks
- All controls and indicators are on one panel

OPTIONS/ACCESSORIES

- Wheel kit
- Water sandblasting or Soda blasting equipment
- Powerspeed VARIO® (rotary nozzle) lance
- Foam Application System
- 3 ft. and 6 ft. Rotary brushes
- Tank Cleaner
- High pressure hose storage reel
- Variety of high pressure hose lengths, and lances
- Contact your KEW® Distributor for a complete line of available accessories

PRODUCTIVITY

- Refueling the burner can be as quick and easy as swapping a full container for an empty one No need to pour fuel
- Accessories quick-connect into the trigger gun which facilitates tool changes for specific tasks
- High efficiency coil and burner heats water quickly and with less fuel

CONTRACTOR SERIES

"SKID-MOUNT" GASOLINE AND DIESEL POWERED HOT WATER PRESSURE WASHERS

SPECIFICATIONS	Master	Diesel Heavy Duty
Part No	6239301	6239201
Pump Pressure	3200 psi	2900 psi
Max. Water Flow	4.8 gpm	4.6 gpm
Max. Water Temperature (Full pressure)	176°F	212°F
Max. Water Temperature (Reduced pressure)		302°F
Inlet Suction Lift		16 ft.
Engine Fuel Consumption	.9 gph	.8 gph
Burner Fuel Consumption (D = 122°F)	1.5 gph	1.5 gph
Burner Fuel Tank Capacity		5 gal
Engine H.P.	13 Honda	16 Rugggerini
Nozzle		Tornado® 05
Size (L x W x H)	46 x 36 x 34 in.	46 x 36 x 42 in.
Weight	484 lb	693 lb



ALTO Cleaning Systems, Inc.
12249 Nations Ford Rd.
Pineville, NC 28134

This product information was reproduced and edited by Fultz Enterprises with permission of ALTO Cleaning Systems, Inc.

DISTRIBUTED BY

Franklin
20 Cedar Street
Franklin, PA 16323

Cleveland
15151-2 York Road
North Royalton, OH 44133



Office: 814.432.4228
Fax: 814.432.4658
Toll Free: 800.533.9870

Office: 440.237.9277
Fax: 440.237.8079
Toll Free: 888.488.9288

www.Fultz-Enterprises.com