

High Flow

Multi-User Cold Water Electric Pressure Washer




KEY FEATURES

- Two-pump system supports one or two operators
- Industrial duty C3 Series, 4 cylinder pumps
- Automatic Start/Stop feature for reduced pump wear
- One operator can use both pumps at once with 5-10 gpm for increased cleaning effect.
- Accepts inlet water up to 160°F providing hot water cleaning capability.

SPECIFICATIONS

Model	High Flow
Part Number	7330921
Motor (hp)	2 x 8.8
Power (VAC/Amps/Phase)	220/25/3 - 440/12.5/3
Max Pressure	2700
Max Water Volume (gpm)	10 (2x5)
Dimensions (in.)	41.5 x 28.5 x 30.2
Weight (lbs.)	300

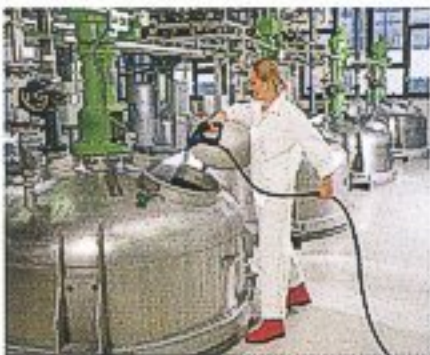

WHO USES THIS MACHINE?

- Food service facilities
- Food processing plants
- Manufacturing areas
- Farming and agricultural interests

WHAT DOES IT DO BEST?

- Removes dirt and grime
- Cleans grease and oil
- Cleans and rinses heavy solids
- *Speeds work typically done by hand*



ALTO Cleaning Systems, Inc.
12249 Nations Ford Rd.
Pineville, NC 28134

This product information was reproduced and edited by Fultz Enterprises with permission of ALTO Cleaning Systems, Inc.

WHAT MAKES IT EASY TO USE?

- Quick couplers for both water supply and high pressure hose
- Easily accessible operator controls
- After selecting one pump or two pump operation, start/stop function is automatic on demand
- Convenient on-board storage for trigger gun, lance and high pressure hoses

WHAT ENHANCES ITS PRODUCTIVITY?

- Adjustable high water volumes for more cleaning effectiveness
- As many as two operators can clean at once
- Accepts inlet water up to 160°F for quick effective cleaning of grease, oil, and fats
- Comes complete with KEW ERGO 3000 trigger gun with safety lock, quick connect lance and 50ft. of high pressure hose



WHAT ADDS TO ITS DURABILITY?

- Rugged tubular stainless steel frame
- Corrosion-resistant cabinet
- Low RPM C3 axial pump design reduces vibration
- TEFC electric motor

WHAT ARE THE SAFETY FEATURES?

- Full enclosed design protects internal components
- Stable three-point stance with locking steering caster
- Built-in overpressure Safety Value in each pump
- Two TEFC (Totally enclosed Fan Cooled) electric motors provide safer operation in wet locations
- Automatic Start/Stop function does not require external wiring or switches

WHAT ARE THE OPTIONAL FEATURES?

- Full range of KEW high pressure cleaning accessories

DISTRIBUTED BY

Franklin
20 Cedar Street
Franklin, PA 16323

Cleveland
15151-2 York Road
North Royalton, OH 44133

Office: 814.432.4228
Fax: 814.432.4658
Toll Free: 800.533.9870

Office: 440.237.9277
Fax: 440.237.8079
Toll Free: 888.488.9288

Fultz
ENTERPRISES

www.Fultz-Enterprises.com

ALTO[®]
Group Member